



F SERIES

W1-2396S

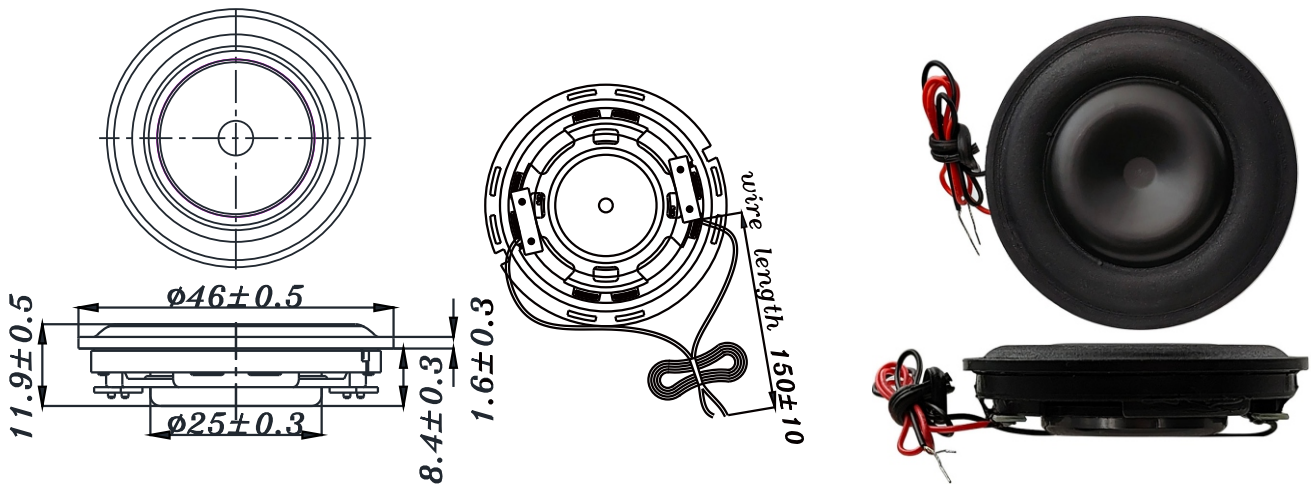

- EXTREMELY SLIM 1" FULL RANGE DRIVER, BUILT WITH MOST INNOVATIVE AND HIGHEST PERFORMANCE DESIGN.
- PPM INJECTION CONE WITH TPV SURROUND, NEODYMIUM MAGNET SYSTEM
- PATENTED PRODUCT WITH EXCELLENT CONSISTENCY
- BEST FOR LIMITED SPACE AND NEED GOOD SOUND APPLICATION

1" PPM, FULL RANGE

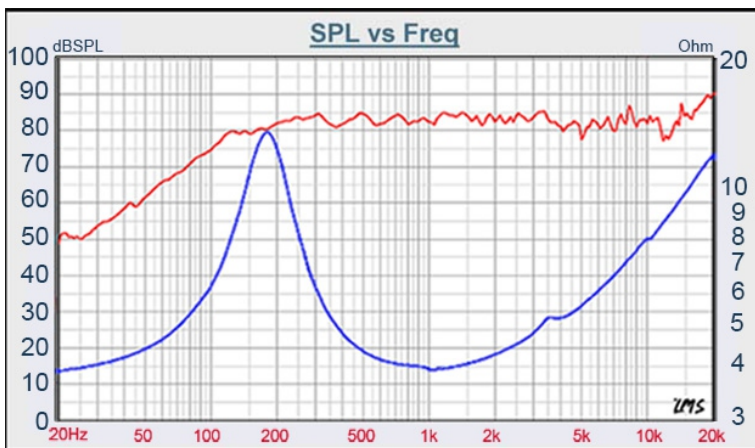

DIAPHRAGM MTL	Mineral filled pp
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.6 Ω
SENSITIVITY 1W/1m	81 dB
FREQUENCY RESPONSE	180 -20K Hz
FREE AIR RESONANCE	180 Hz
VOICE COIL DIAMETER	19.40 mm
AIR GAP HEIGHT	1.5 mm
RATED POWER INPUT	3 W
MAXIMUM POWER INPUT	6 W
FORCE FACTOR, BL	2.13 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	0.9 g
FERROFLUID ENHANCED	YES
SUSPENSION COMPLIANCE	888.78 μMN^{-1}
EFFECTIVE PISTON AREA	0.00096 M^2
Levc	0.042 mH
Zo	16 Ω
X-max	1.1 mm
Vas	0.12 Liter
Qts	0.59
Qms	2.21
Qes	0.80

TB SPEAKERS

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com