


# WF SERIES


# W6-1914S

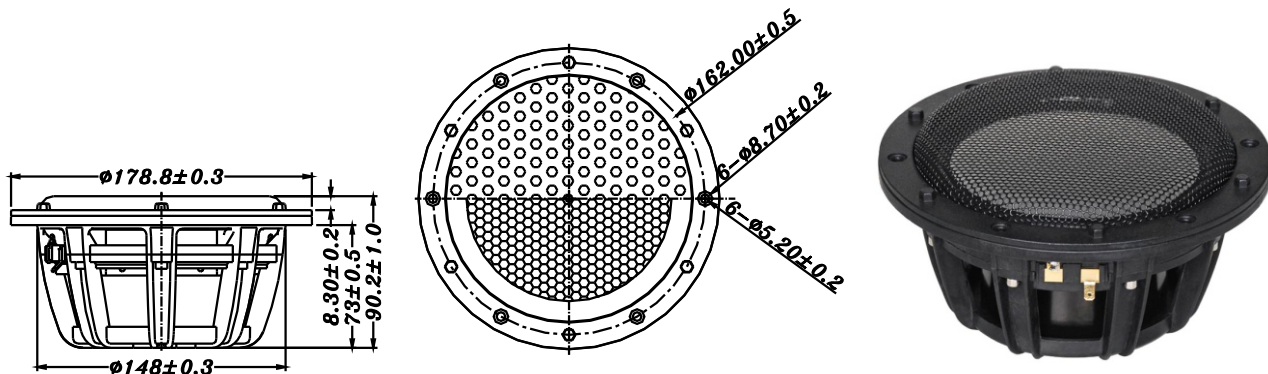

- 6.5" OF MIDRANGE SPEAKER DESIGN
- EXTREMELY WIDE OF FREQUENCY RESPONSE DISPERSION
- ALUMINUM SANDWICH CONE BODY, LIGHT WEIGHT AND HIGH STIFFNESS
- VERY LOW THD (2<sup>nd</sup> AND 3<sup>rd</sup> HARMONIC DISTORTION)
- FOR BETTER HUMAN BEING VOICE, IT'S AVAILABLE FOR LOW X-OVER DESIGN

## 6.5" SANDWICH MIDRANGE

DIAPHRAGM MTL	Sandwich
SURROUND MTL	Foam Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.5 Ω
SENSITIVITY 1W/1M	89 dB
FREQUENCY RESPONSE	65 - 7K Hz
FREE AIR RESONANCE	65 Hz
VOICE COIL DIAMETER	66.5 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	45 W
MAXIMUM POWER INPUT	90 W
FORCE FACTOR, BL	11.61 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	22.95 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	242.96 $\mu\text{MN}^{-1}$
EFFECTIVE PISTON AREA	0.014 M <sup>2</sup>
Levc	0.08 mH
Zo	120 Ω
Xmax	0.5 mm
Vas	6.76 Litr
Qts	0.44
Qms	7.88
Qes	0.47

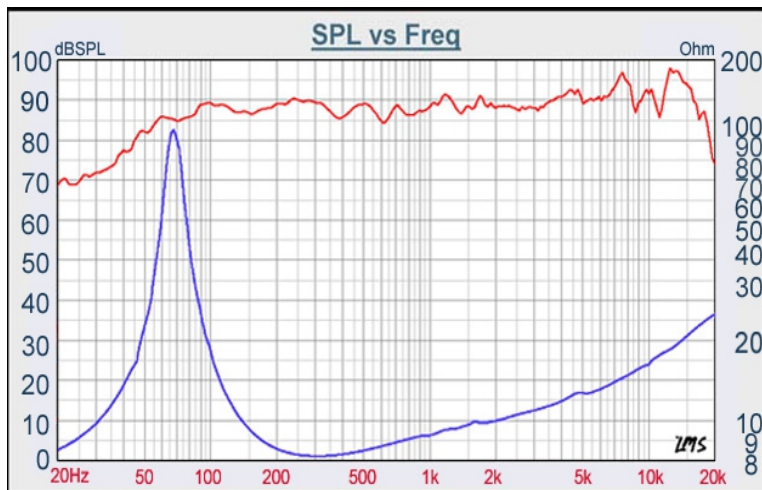

# TB SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166  
E-MAIL: info@tb-speaker.com