



F SERIES

W8-2314

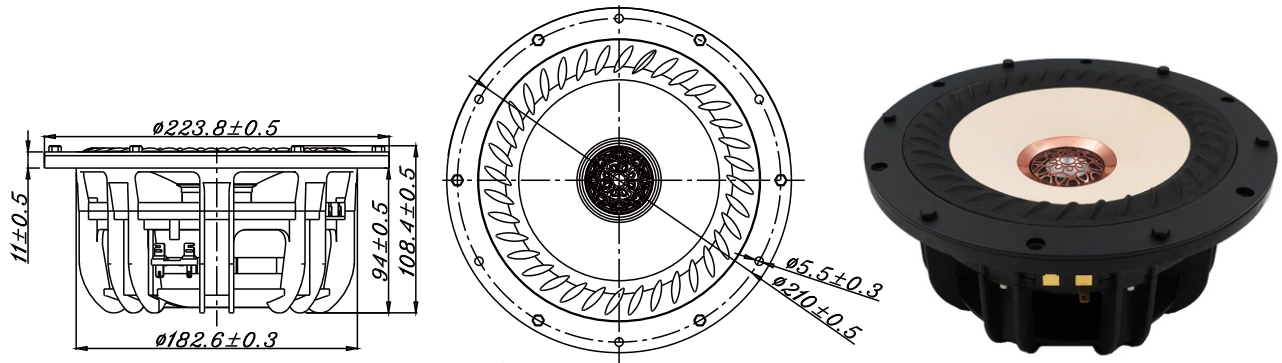

- 25mm TWEETER WITH 8" WOOFER COAXIAL SPEAKER DESIGN.
- UNDERHUNG MOTOR DESIGN WITH NEODYMIUM MAGNET TO REACH LOW THD (2nd, 3rd HARMONIC DISTORTION).
- BAMBOO FIBER PAPER CONE WITH DURABLE RUBBER SURROUND.
- ALUMINUM / MAGNESIUM ALLOY MEMBRANE TWEETER WITH BACK CHAMBERS DESIGN TO PERFORM 800 UP TO 40KHZ.

8" PAPER COAXIAL FULL RANGE

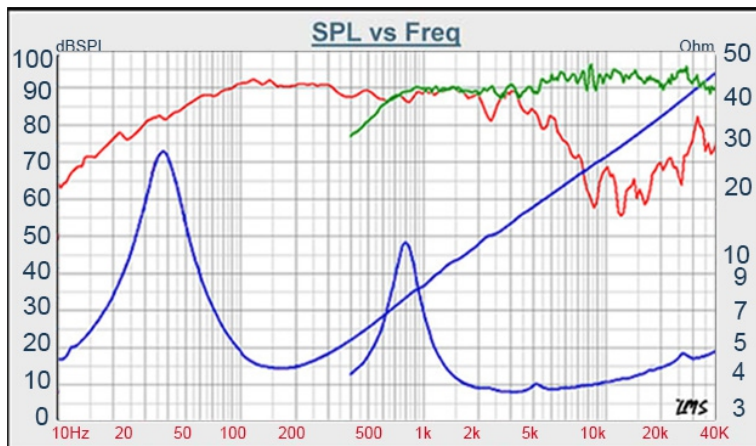

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.6 Ω
SENSITIVITY 1W/1M	90 dB
FREQUENCY RESPONSE	38Hz-40 K Hz
FREE AIR RESONANCE	38 Hz
VOICE COIL DIAMETER	44.43 mm
AIR GAP HEIGHT	18 mm
RATED POWER INPUT	50 W
MAXIMUM POWER INPUT	100 W
FORCE FACTOR, BL	7.40 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	23.14 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	745.94 uMN ⁻¹
EFFECTIVE PISTON AREA	0.0022 M ²
Levc	0.072 mH
Zo	30 Ω
Xmax	6 mm
Vas	51.27 Litr
Qts	0.31
Qms	2.14
Qes	0.37

TB SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com